


**RDI ENGINEERING**  
**P/N 5200-00**  
**TEFLON RELIEF VALVE**  
**PUREPRESSURE SERIES**

**SPECIFICATIONS:**

- ALL WETTED SURFACES PTFE
- ALL EXTERIOR SURFACES PTFE
- PRESSURE RATING, 0-100 PSIG
- TEMPERATURE RATING, -40 TO +140 °F, (De-rated Pressure @ Hotter Temp)
- RELIEF PRESSURE RANGE, 0-60 PSIG
- ADJUSTABILITY: FACTORY SET PRESSURE RELIEF SETTING,
- LEAK TIGHTNESS <math>1 \times 10^{-3}</math> SCCS
- CRACK PRESSURE, 10-15% BELOW 60 PSIG
- FULL FLOW AT 60 PSIG
- RESEAL PRESSURE, 10-15% BELOW CRACK PRESSURE TO MEET  $1 \times 10^{-3}$  SCCS

→ OPTIONS:

- FIELD ADJUSTABLE PRESSURE SETTING AVAILABLE, SIZE MAY VARY.
- CUSTOMER SPECIFIED FITTING AVAILABLE
- METAL CONSTRUCTION FOR HIGHER PRESSURE AND FLOW AVAILABLE.

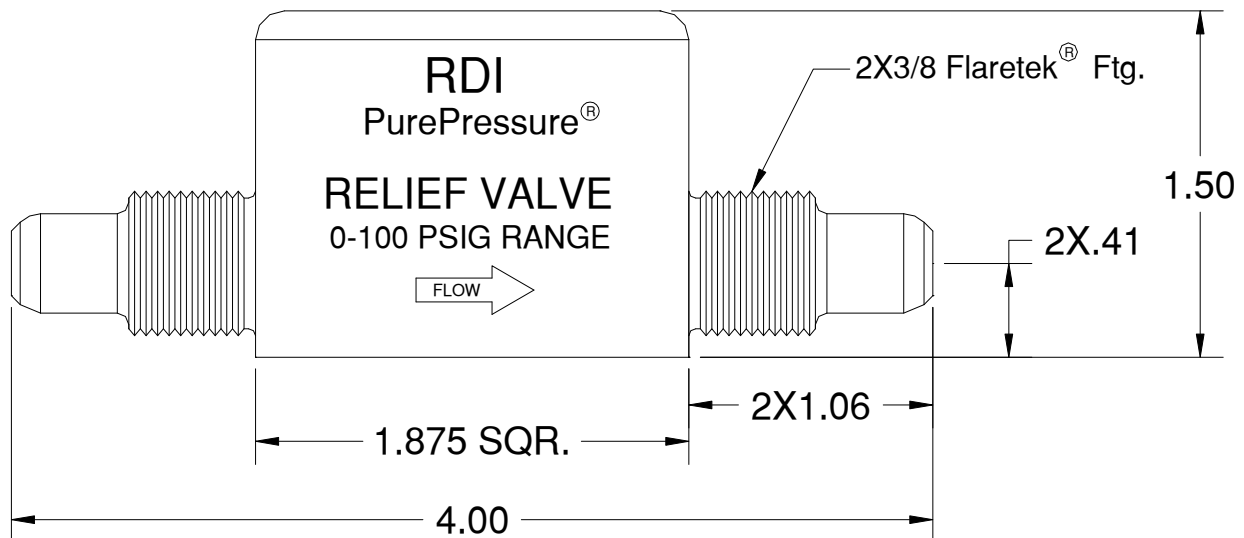

**FOR MORE INFORMATION CONTACT US**  
**@ [info@rdiengineering.com](mailto:info@rdiengineering.com)**  
**U.S. Phone No. (909) 981-2444**